

Ultra 650

Specification code: AP-AGL-UL650-[CCT]



With its slim, compact shape, the ULTRA 650 module is designed for brighter and deeper signs. ULTRA 650 features an innovative optic that expands its coverage across the sign, with light output up to 100 lumens per module. With spacing at 8 in. (200 mm), ULTRA 650 modules are rated IP68 and come with a 9-year warranty.

Applications:

- Channel letters
- Box signs
- Cove lighting
- Applications starting at 3 in. (75 mm)



UL US CE IP68 LM-79 LM-80



ONEWhite® COLOR CONSISTENCY



VERSALENZ® ADVANCED OPTICS



CAPZUL® WATERPROOF



CONSTANT CURRENT



UV RESISTANT



50,000 HRS L70 LIFETIME

ORDERING GUIDE

Part Number	CCTs	Module Spacing (in./mm)	Wattage (W)	Input Current (mA)	Number of Modules					
					Per Foot	Per Meter	Per Watt	Per Module	Per Foot	Per Meter
AP-AGL-UL650-7100K	7100K	8 / 200	0.78	65	1.5	5	128	100	150	500
AP-AGL-UL650-6500K	6500K	8 / 200	0.78	65	1.5	5	128	100	150	500
AP-AGL-UL650-5700K**	5700K	8 / 200	0.78	65	1.5	5	128	100	150	500
AP-AGL-UL650-5000K	5000K	8 / 200	0.78	65	1.5	5	128	100	150	500
AP-AGL-UL650-4500K**	4500K	8 / 200	0.78	65	1.5	5	128	100	138	460
AP-AGL-UL650-4000K**	4000K	8 / 200	0.72	60	1.5	5	128	92	138	460
AP-AGL-UL650-3000K**	3000K	8 / 200	0.66	55	1.5	5	129	85	128	425
AP-AGL-UL650-2700K**	2700K	8 / 200	0.72	60	1.5	5	118	85	128	425



** Limited stock

* ±10%

PRODUCT RATINGS

Input Voltage	Power	12 VDC
Supply Loading	Ingress	70 modules per 60 W
Protection	Operating	IP68
Temperature	Lifetime	-40 – 140 °F (-40 – 60 °C)
(L70 reported)		50,000 hours @ 60 °C
Warranty		9-year limited warranty

LUMINOUS INTENSITY DISTRIBUTION

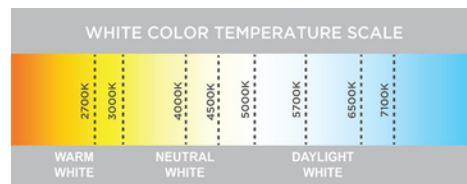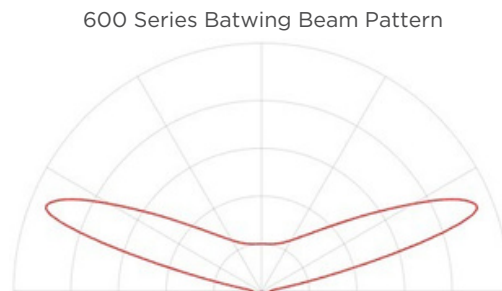

DIMENSIONS



Data sheet subject to change without notice.

REV.13JAN2025

Exclusive UK distributor



Discuss your project with our Applelec Projects team:
appleleccompany.co.uk | projects@applelec.com | 01274 77 44 77

Ultra 650

Specification code: AP-AGL-UL650-[CCT]



SHIPPING INFORMATION

Module Type	Specs	Packaging Quantity			Carton Weight	Box Dimensions			Carton Dimensions			
		Per Bag	Per Box	Per Carton		W	D	H	W	D	H	
AP-AGL-UL650-[CCT]	Modules	100	500	2000	46.1 lb 20.9 kg	22.1	10.6	4.5	31.0	23.1	9.9	in.
	Feet	66	328	1312		560	270	115	788	588	252	mm
	Meters	20	100	400								

LAYOUT GUIDE*

Channel Depth (in.)	Single Row		Multiple Rows		Channel Depth (mm)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
3	10	6.5	6.5	6.5	75	250	165	165	165
4	13	7.87	9	7.87	100	330	200	225	200
5	17	7.87	13	7.87	125	430	200	330	200
6	17	7.87	16	7.87	150	430	200	405	200
7	15	7.87	15	7.87	175	380	200	380	200

*Density guide designed to maintain a minimum of 600 lux for a single row or 800 lux for multiple rows at sign face (7328 white).

POWER SUPPLY LOADING

AP-AGL-UL650-[CCT]					
	Power Supply	Max. # of Modules Per Continuous String	Total # of Modules Per Power Supply	Total # of Feet	Total # of Meters
UL CLASS 2	12 W	14	14	9.2	2.8
	15 W	17	17	11.2	3.4
	36 W	40	41	26.9	8.2
	60 W	67	70	45.9	14
	180 W	67	210	137.7	42
UL CLASS 1	100 W	67	115	75.5	23
	150 W	67	173	113.5	34.6
	180 W	67	207	135.8	41.4
	220 W	67	253	166	50.6

Note 1. The number of modules in each of the parallel strings should not exceed the specified maximum.
2. *3 - 60 Watt Channels



1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 12 Volt or less.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY -When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry, damp, and wet locations. Not suitable for submersed applications.

Exclusive UK distributor



Discuss your project with our Applelec Projects team:
applelecprojects.co.uk | projects@applelec.co.uk | 01274 77 44 77