

# Pro Premium 2

Specification code: AP-AGL-PP2-[CCT]



optics and batwing beam patterns that enable large areas of light coverage. Each PRO Premium module contains an integrated circuit that maintains constant current, so there is no lumen drop across any string of modules. Spaced at 6 inches (150 mm), our versatile 24V PRO Premium 2 modules are rated IP68 and available in 5 brilliant color temperatures from 3000K to 7100K.

Applications:

- High-brightness channel letters
- High-brightness box signs
- Cabinet signs
- Accent lighting



UL US CE IP68 LM-79 LM-80

UL LISTED RoHS



24V DC



9 YEAR WARRANTY



ONEWhite® COLOR CONSISTENCY



VERSALENZ® ADVANCED OPTICS



CAPZUL® WATERPROOF



CONSTANT CURRENT



UV RESISTANT



70,000 HRS L70 LIFETIME

## ORDERING GUIDE

Part Number	White Color Temp.	Module Spacing (mm)	Number of Modules		Nominal Light Output (lm)*		
			Per Foot	Per Meter	Per Module	Per Foot	Per Meter
AP-AGL-PP2-7100K**	7100K	150	2.03	6.67	35	71	233
AP-AGL-PP2-6500K	6500K	150	2.03	6.67	35	71	233
AP-AGL-PP2-5000K**	5000K	150	2.03	6.67	35	71	233
AP-AGL-PP2-4000K**	4000K	150	2.03	6.67	33	67	220
AP-AGL-PP2-3000K**	3000K	150	2.03	6.67	33	67	220


\*\* Limited stock

\* ± 10%

## PRODUCT RATINGS

Luminous Efficacy	175 lm/W @ 6500K
Wattage per Module	0.20 W Nominal
Input Voltage	24 V DC
Input Current	0.008 A/ module
Ingress Protection	IP68
Operating Temperature	-40° - +140° F (-40° - +60° C)
L70 Lifetime @ 60° C	70,000 Hours
Warranty	9 Year Limited Warranty

## LUMINOUS INTENSITY DISTRIBUTION

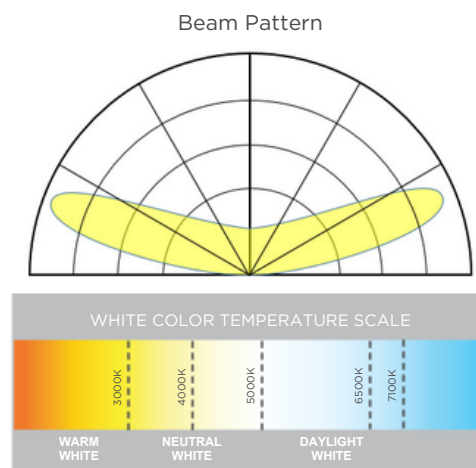

## MODULE DIMENSIONS

Part Number	Length (in/mm)	Width (in/mm)	Height (in/mm)
AP-AGL-PP2-[CCT]	2.26/57.3	0.72/18.28	0.44/11.25

Data sheet subject to change without notice.

REV.10JAN2025

Exclusive UK distributor

Discuss your project with our Applelec Projects team:  
[appleleccompany.co.uk](http://appleleccompany.co.uk) | [projects@appleleccompany.co.uk](mailto:projects@appleleccompany.co.uk) | 01274 77 44 77

# Pro Premium 2

Specification code: AP-AGL-PP2-[CCT]



## POWER SUPPLY LOADING

Module Type	AP-AGL-PP2-[CCT]			
	Max. # of Modules Per String	Total # of Modules	Total # of Feet	Total # of Meters
Power Supply (wired in Parallel Strings)				
UL Class 2 60W	273	288	141.7	43.2
100W	307	479	235.7	71.9

## REMOTE MOUNTING DISTANCE

Power Supply	18AWG (ft/m)	16AWG (ft/m)	14AWG (ft/m)	12AWG (ft/m)
60W	20/6.1	25/7.6	35/10.6	40/12.1
100W	20/6.1	25/7.6	35/10.6	40/12.1

Notes:  
 1. Power supply always has 8% buffer  
 2. These values are good for use with Power Supply Loading Table Single String Max Module values

- Notes:  
 1. Loading calculated at 25°C.  
 2. For maximum loading to be reached, a center connection to the LEDs is recommended to minimize voltage drop.  
 3. All values include an 8% buffer from maximum load.  
 4. Single String Max Modules values can be used with the remote mounting to power supply table.

## LAYOUT GUIDE\*

Channel Depth (in.)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing
1.57	3.9	3.5	3.2	3.5
2	4.9	4.3	3.9	4.3
3	7.1	5.9	5.9	5.9
4	9.8	5.9	7.9	5.9
5	11.8	5.9	9.8	5.9


Channel Depth (mm)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing
40	100	90	80	90
50	125	110	100	110
75	180	150	150	150
100	250	150	200	150
125	300	150	250	150

\*Module spacing is defined to achieve minimum 600 lux at sign face (7328 white)  
 \*\*Modules are staggered

## SHIPPING INFORMATION

Module Type	Specs	Packaging Quantity			Carton Weight	Box Dimensions			Carton Dimensions									
		Per Bag	Per Box	Per Carton		W	D	H	W	D	H							
AP-AGL-PP2-[CCT]	Modules	100	600	1200	inch	13.8	9.8	9.1	20.5	14.6	10.2							
	Feet	49.2	295.3	590.6								mm	350	250	230	520	370	260
	Meters	15	90	180														

## DIMENSION DRAWING

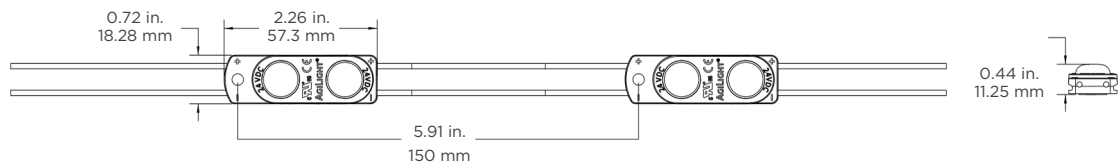

1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 24 Volt.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY - When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply. These products may be secured in place in the end product by any means available. These products are suitable for use in dry, damp, and wet locations. Not suitable for submersed applications.

Exclusive UK distributor



Discuss your project with our Applelec Projects team:  
[appleleccompany.co.uk](http://appleleccompany.co.uk) | [projects@applelec.co.uk](mailto:projects@applelec.co.uk) | 01274 77 44 77