

# Ultra 650 RGBW

Specification code: AP-AGL-UL650-RGBW



## ULTRA 650 RGBW

ULTRA 650 RGBW modules are premium color changing signage modules engineered for constant current so there is no lumen drop across the full length of any string. The ULTRA 650 RGBW module features four chips in each LED - red, green, blue and white for added brightness. Use DMX controls to tune ULTRA 650 RGBW modules to any color.



UL LISTED CE RoHS IP66



12 VDC



5-YEAR WARRANTY



VERSALENZ®  
ADVANCED OPTICS



CAPZUL®  
WATERPROOF

### Applications:

- Channel letters
- Box signs
- Cove lighting
- Applications starting at depths of 3 in. (75 mm)

## ORDERING GUIDE



Part Number	Colors & CCT	Module Spacing (mm)	Wattage (W)	Input Current (mA)	Number of Modules		Nominal Light Output (lm)			
					Per Foot	Per Meter	Per Watt	Per Module	Per Foot	Per Meter
AP-AGL-UL650-RGBW	All	200	1.2	100	1.5	5	52	62.6	95.4	313
	Red (612-628 nm)	200	0.3	25	1.5	5	25.3	7.6	11.6	38
	Green (512-528 nm)	200	0.3	25	1.5	5	61.7	18.5	28.2	92.5
	Blue (457-473 nm)	200	0.3	25	1.5	5	20	6	9.1	30
	White (6500K)	200	0.3	25	1.5	5	101.7	30.5	46.5	152.5

## RECOMMENDED CONTROL OPTIONS

Options	Image	Description	Part Number
1 For basic setting		4 Zone Color Changing Glass Touch Wall Controller	AWCRGBWWBK
		5 Channel DMX Interface	DMXINFLCD5
2 For wireless connection		4 Channel RF Interface	RFINTERFACE4CH
		4 Zone RGBW RF Remote	RFREMOTERGBW4Z
		RF to WiFi Converter	RFWIFICONVERT
3 For advanced setting		4 Channel Waterproof DMX LCD Interface	DMXINFWLCD4
		5 Zone DMX Wall Controller	DMXCTRL
		10 Zone DMX Wall Controller	DMXCTRLD

## LUMINOUS DISTRIBUTION

Batwing Beam Pattern

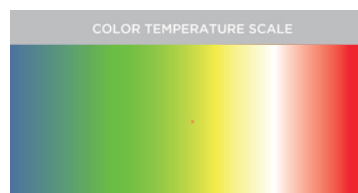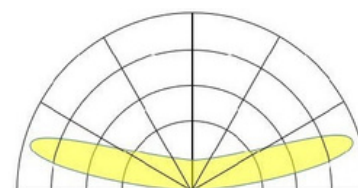

CONSTANT CURRENT



UV RESISTANT

## PRODUCT RATINGS

Input Voltage	12 VDC
Power Supply Loading	46 modules per 60 W
Ingress Protection	IP66
Operating Temperature	-13 — 131 °F (-25 — 55 °C)
L70 Lifetime @ 60° C	50,000 hours
Warranty	5-year limited warranty

Data sheet subject to change without notice.

REV.14MAR2025

Exclusive UK distributor



Discuss your project with our Applelec Projects team:  
applelecprojects.co.uk | projects@applelec.co.uk | 01274 77 44 77

# Ultra 650 RGBW

Specification code: AP-AGL-UL650-RGBW



## MODULE DIMENSIONS

Part Number	Length (in. / mm)	Width (in. / mm)	Height (in. / mm)
AP-AGL-UL650-RGBW	2.62 / 66	0.61 / 15	0.38 / 10

## POWER SUPPLY LOADING

Module Type	Per 60W Power Supply			
	Max. # of Modules Per String	Total # of Modules	Total # of Feet	Total # of Meters
AP-AGL-UL650-RGBW	44	46	30.7	9.3

## LAYOUT GUIDE


Channel Depth (in.)	Single Row		Multiple Rows		Channel Depth (mm)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
3	6	5	4	4	75	150	125	100	100
4	9	6	6	7	100	225	150	150	175
5	12	8	10	8	125	300	200	250	200
6	14	8	12	8	150	350	200	300	200

\*Module spacing is defined by 7328 white sign face material

## SHIPPING INFORMATION

Module Type	Specs	Packaging Quantity			Carton Weight	Carton Dimensions			Box Weight	Box Dimensions			
		Per Bag	Per BOX	Per Carton		L	W	H		L	W	H	
LS-U650-RGBW-B200-A	Modules	100	400	800	12.3 kg (27.1 lbs)	20.5	14.6	10.2	6 kg (13.2 lbs)	13.78	9.84	9.06	in.
	Feet	65.6	262.4	524.8									
	Meters	20	80	160									
						520	370	260		350	250	230	mm

## DIMENSION DRAWING

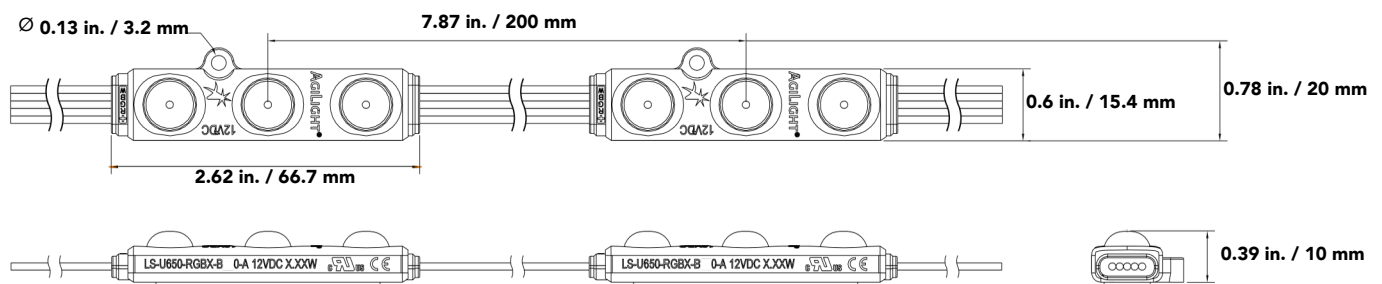

1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 12 Volt or less.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY - When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry, damp, and wet locations. Not suitable for submersed applications.

Exclusive UK distributor



Discuss your project with our Applelec Projects team:  
[applelecprojects.co.uk](http://applelecprojects.co.uk) | [projects@applelec.co.uk](mailto:projects@applelec.co.uk) | 01274 77 44 77